


SMOOTH | SLATE
B 500-1300



Technical characteristics may be modified without prior notice. Dimensional tolerances +/-5mm.

Standard Colours

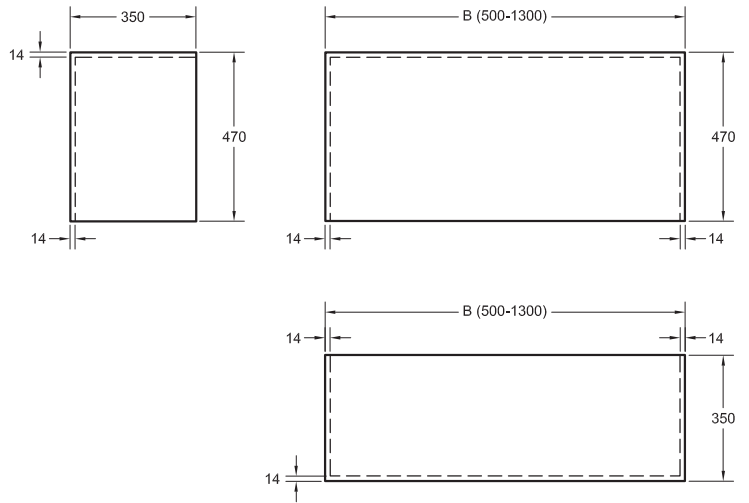

Special Colours




213 Colours RAL



Product Information

The bench is supplied with 2 reinforcing legs +1 cartridge of silicone + 1 insert in the colour of the tray in the size required to fill the space between the bench and the wall (available thicknesses: 25, 30, and 35 mm).

ATTENTION: We advise you not to glue the bench to the shower enclosure or to install it directly on the shower tray.

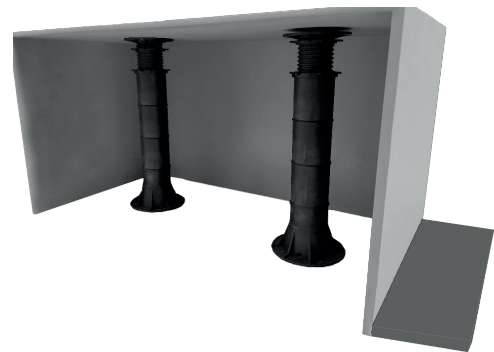

Guarantee 5 Years.



Quarex Material.
Resin + mineral fillers.



Cut to size.



Installation:
Please consult the installation manual.



High Coating UV resistance.



SUPERIOR HARDNESS coating
(<0.01 mm, according to UNE EN 14688;
maximum allowed 0.1 mm).



Coating with excellent resistance
to hydrolysis.



Packaging in reinforced cardboard
with wooden structure.



Anti-bacterial treatment
R<2 ISO 22196.