






PIZARRA | LISO
A 600-2000 | B 400-600



15 Kg / ML

 Resin + Mineral fillers + Coating	 5 YEARS GUARANTEE	 Coating with excellent resistance to hydrolysis.	 High coating UV resistant.
 SUPERIOR HARDNESS coating (<0.01 mm according to UNE EN 14688; maximum allowed 0.1 mm).	 Antibacterial treatment R<2 ISO 22196.	 Special cuts available. It can be cut on site by diamond saw	 Consult installation manual.

Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.

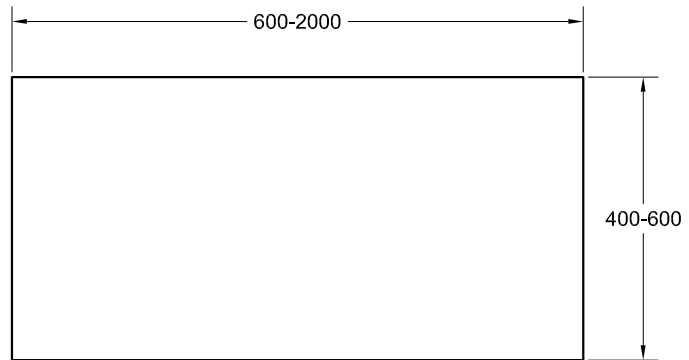

**WALL BRACKETS AND
FIXINGS INCLUDED**

STANDARD COLOURS



SPECIAL COLOURS



RAL



213 RAL

NCS



1950 NCS