

Resin + Mineral fillers
+ Coating

5 YEARS
GUARANTEE

Anti-slip coating.
DIN 51097.

Coating with excellent
resistance to hydrolysis.

High coating
UV resistant.

SUPERIOR HARDNESS coating
(<0.01 mm according to UNE EN
14688; maximum allowed 0.1 mm).

Antibacterial treatment
R<2 ISO 22196.


Special cuts available.
It can be cut on site by
diamond saw.

Recessed, raised or on Quare
feet installation. Consult
installation manual.

Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.

47 kg/m²

(*) Maximum recommended cut. For other cuts, please consult us.

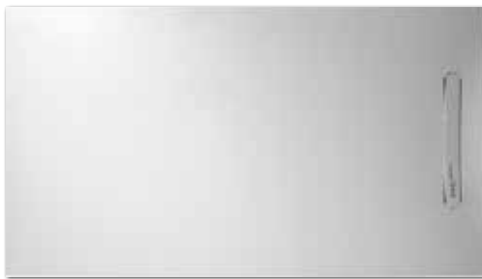

LISO
A 900-1800 | B 700-1000



Class B / PN 18 / Class 2

		A (mm)									
		900	1000	1100	1200	1300	1400	1500	1600	1700	1800
700	C	125	125	125	125	125	125	125	125	125	125
	H	27	27	27	27	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	0	0	0	0	0	0	0	0	0	0
800	C	125	125	125	125	125	125	125	125	125	125
	H	27	27	27	27	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	50	50	50	50	50	50	50	50	50	50
900	C	125	125	125	125	125	125	125	125	125	125
	H	27	27	27	27	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	100	100	100	100	100	100	100	100	100	100
1000	C	125	125	125	125	125	125	125	125	125	125
	H	27	27	27	27	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	150	150	150	150	150	150	150	150	150	150

STANDARD COLOURS

PURE WHITE

CREMA

GREY

GREGE

SILK GREY

FANGO

MACCHIATO

TERRA

GRAFITE

ANTRACITE

BLACK

WASTE

SLIM + SHOWER WASTE

Flow rate 27 l/mn
Height 56 mm

SPECIAL COLOURS

GOLD

FOSSIL

TERRACOTTA

RAL 213 RAL

NCS 1950 NCS

GRIDS

STAINLESS
STEEL GRID

COLOURED
STAINLESS STEEL GRID

PVD GRID