

47 kg/m²

Resin + Mineral fillers
+ Coating

5 YEARS
GUARANTEE

Anti-slip coating,
DIN 51097.

Coating with excellent
resistance to hydrolysis.

High coating
UV resistant.

SUPERIOR HARDNESS coating
(<0.01 mm according to UNE EN
14688; maximum allowed 0.1 mm).


Antibacterial treatment
R<2 ISO 22196.

Special cuts available.
It can be cut on site by
diamond saw.

Recessed, raised or on Quare
feet installation. Consult
installation manual.

Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.

(*) Maximum recommended cut. For other cuts, please consult us.

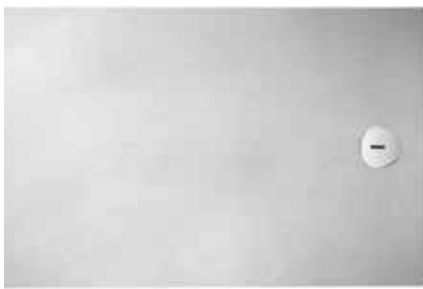

STREET
A 900-1800 | B 700-1000



Class C / PN24 / Class 3

		A (mm)									
		900	1000	1100	1200	1300	1400	1500	1600	1700	1800
700	C	160	160	160	160	160	160	160	160	160	160
	H	30	30	30	30	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	0	0	0	0	0	0	0	0	0	0
800	C	160	160	160	160	160	160	160	160	160	160
	H	30	30	30	30	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	50	50	50	50	50	50	50	50	50	50
900	C	160	160	160	160	160	160	160	160	160	160
	H	30	30	30	30	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	100	100	100	100	100	100	100	100	100	100
1000	C	160	160	160	160	160	160	160	160	160	160
	H	30	30	30	30	30	30	30	30	32	32
	X*	0	100	200	300	200	300	200	300	200	300
	Y*	150	150	150	150	150	150	150	150	150	150

STANDARD COLOURS



SPECIAL COLOURS



RAL



NCS



WASTES

EXTRA FLAT SHOWER WASTE

Flow rate 35 l/mn
Height 54 mm



VERTICAL SHOWER WASTE

Flow rate 35 l/mn
Height 96 mm



HIGH FLOW SHOWER WASTE

Flow rate 50 l/mn
Height 80 mm



SLIM + SHOWER WASTE

Flow rate 27 l/mn
Height 56 mm



WASTE COVER

RESIN WASTE COVER IN LISO
FINISH (SMOOTH), COLOURED

